



IT310 - IT310W

Network Camera with Pan/Tilt

Quick Installation Guide

This guide describes the basic functions of Network Camera with Pan/Tilt.

All detailed information is described in the user's manual.



Warning Before Install

- Power off the Network Camera as soon as it is found smoking or smelt unusual.



Contact your distributor when such cases happen.

- Keep the Network Camera away from the water. If the Network Camera is wet, power off immediately.




Contact your distributor when such cases happen.


- Do not place the Network Camera around the heat sources, such as television or oven.



- Refer to your user's manual for the operating temperature.




- Keep the Network Camera away from the direct sunlight.




- Do not place the Network Camera in high humid environments.



- Do not place the Network Camera on unsteady surfaces.




- Do not touch the Network Camera when it's lightning.




- Do not disassemble the Network Camera.




- Do not drop the Network Camera.



- Do not manually pan and tilt the Network Camera when the power is on.



- Do not insert any object into the Network Camera, such as needles.

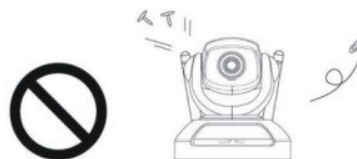

1 Check package contents

● The Network Camera
(wire or wireless model)



● Camera stand



● Antennas for wireless model only




● Remote controller



● Power adapter



● A/V cable




● Software CD




2 Physical description


● Front panel

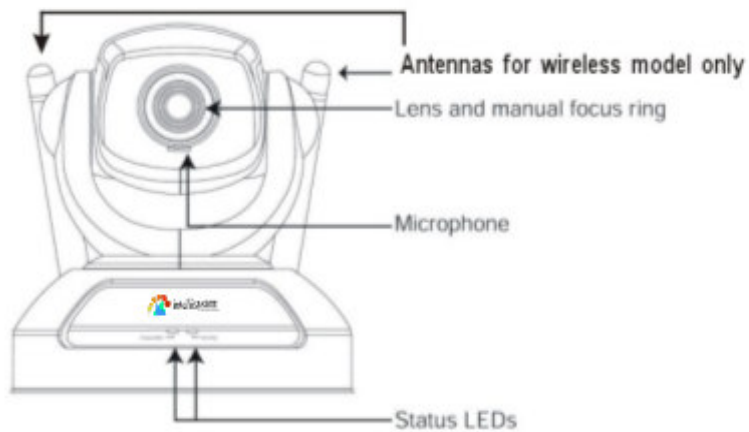

● Rear panel

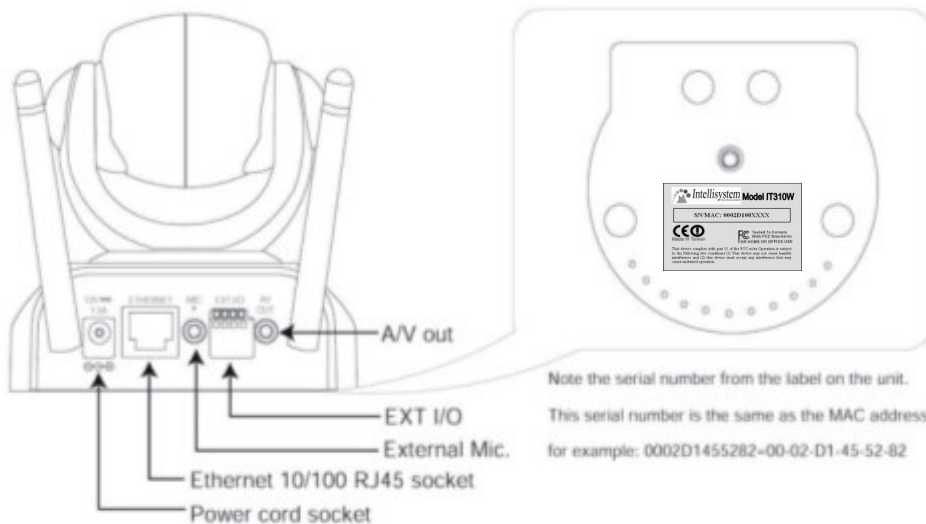

3 Install your Network Camera in Ethernet network

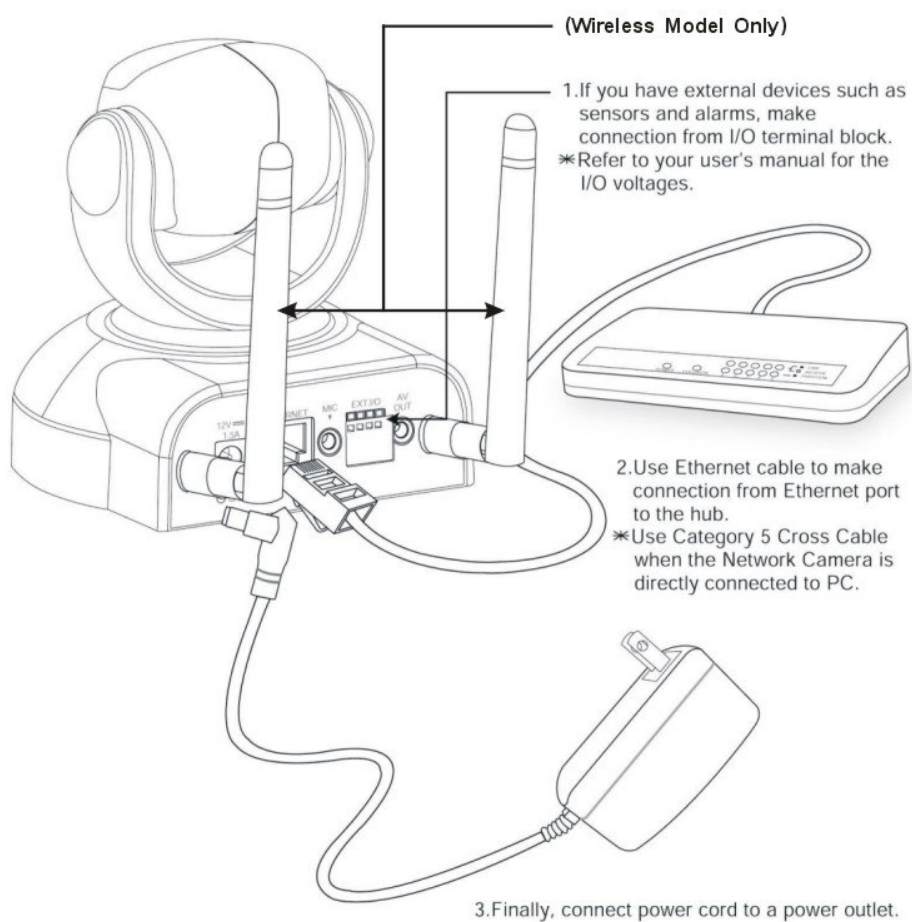


4 Assign IP address

1. Run the Installer under the Utility directory from software CD.


2. The program will search the cameras on the same LAN.



3. After searching, the main installer window will pop up. Click on serial number that matches the one you just note from  Physical description

4. Click "Link to selected device" to connect the Internet Explorer to the Network Camera.

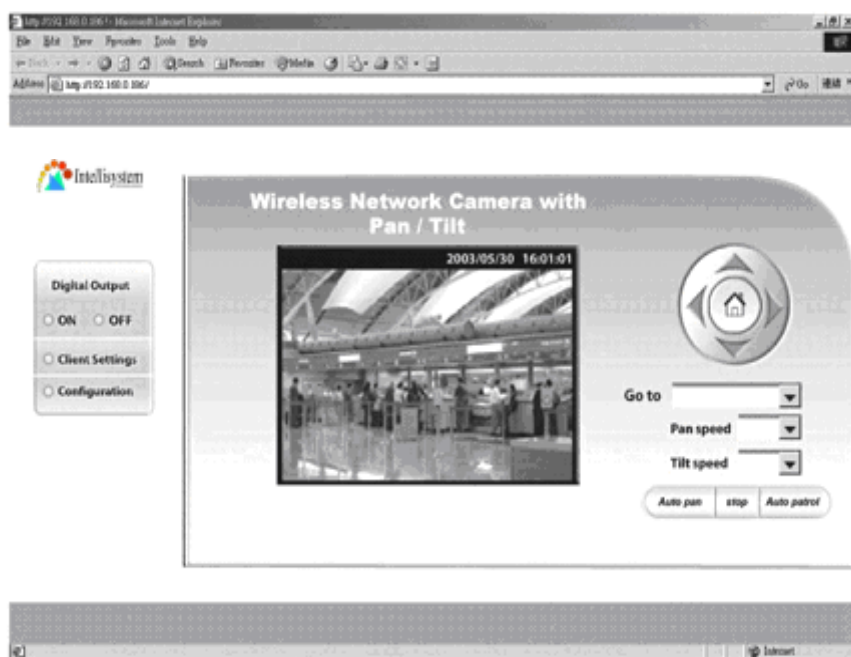


5 The Internet Explorer Connects to the Network Camera

For setup wireless mode and further configuration, please check user's manual on the software CD.

6 Client Settings

At the initial access to the "Connection Type" page, the web browser will ask for a new plug-in installation, the plug in being Network Camera. This plug-in has been registered for certification and can be used to change the parameters at the client's site. The user may click on to install the plug-in. If the web browser does not allow the user to complete the installation, check the Internet security in order to set on your web browser to "Ask confirmation for download ActiveX control without electronic Signature" and so refresh the current web page. If the problem persist please contact your IT or networking supervisor.

1. Type the IP address and press enter



2. Type "root" as user name and the serial number as password, then press enter or click ok